

12 Volt 60 Watt Class 2 LED Driver

- Universal input voltage 120 ~ 277 Vac
- Wet, Damp and Dry Location Rated
- Class 2 Output



Performance

Input Voltage	120 ~ 277 Vac
Input Current (Amps)	0.58A /120V 0.26A/277V
Input Frequency	50 - 60 (Hz)
Power Factor	> 0.90
THD max	< 10 %
Output Voltage	12 ± 5 %
Output Current	5 (A) max
Output Power	60 W max

Physical

Length	10.7 in
Width	2.1 in
Height	1.5 in
Mounting Length	9.9 in w/ 0.9 in offset
Weight	1.7 lbs.
Lead Lengths	
Blk, Wht, Grn	24 in.
Red, Blk (Jacketed)	61 in.

Environmental

EMI and RFI	Meets FCC part 15 Non-Consumer Limits (Class A)
Operating Temperature	-30°C to 60°C (-22°F to 140°F)
Storage Temperature	-40°C to 85°C (-40°F to 185°F)
tc	85°C (185°F) max
IP Rating	IP67

Specifications subject to change without notice.

Protection:

- Over voltage, Over current and short circuit


Safety:

- UL 1310
- CAN/CSA-C22.2 No. 223-M91

Installation:

- Class 2 wiring per NEC Article 725 is required.
- This unit is intended to be mounted with the input side connected with a 1/2" conduit adapter to a junction box.

Wiring Diagram:

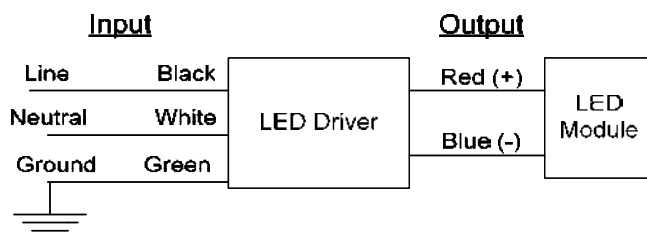

Lead-wires are 18 AWG 105°C /600V solid copper.

Warranty:

Universal Lighting Technologies warrants to the purchaser that each power supply will be free from defects in material or workmanship for a period of 5 years from the date of manufacture when properly installed per instructions and under normal operating conditions of use.



SIGN • LIGHTING • GRAPHICS • DISPLAY

Excellence in Distribution Since 1946

www.IECDelivers.com