



SIGN • LIGHTING • GRAPHICS • DISPLAY

Excellence in Distribution Since 1946

SloanLED® Simple Solutions for illuminating box signs



SignBOX™ II

Flexible and easy to install, SignBOX II creates the perfect grid of light for bright, even illumination. Perfect for new and retrofit cabinet signs with can depths as shallow as 5 inches. Available in single- and double-sided configurations.




2240 Yates Ave. Commerce, CA 90040

800.CALL IEC (225.5432) | Fax 323.803.2019 | www.IECDelivers.com




SignBOX™ II

LED illumination for single- or double-sided box signs



Easy to install—flexible and firm—SignBOX™ II creates the perfect grid of light for optimum even illumination. Designed for new or retrofit box signs with can depths over 5 inches. Available in single-sided and double-sided options.

- Bright, even illumination
- Mounted on flexible straps for easy installation
- Constant Current Technology (CCT)

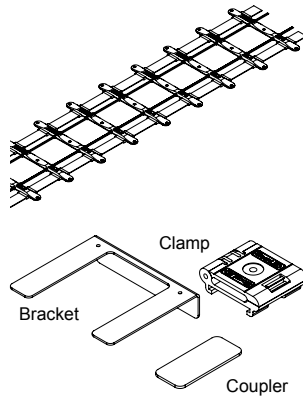

Specifications

Part number	Single-sided	White (6500 K)	SLO-SB2-W1S
	Single-sided	White (5000 K)	SLO-SB2-SW1S
	Double-sided	White (6500 K)	SLO-SB2-W2S
	Double-sided	White (5000 K)	SLO-SB2-SW2S
Dimensions L x W x H	8.5 in x 1.0 in x 0.3 in 60 modules per 20 ft chain		
Viewing angle	120°		
LEDs per module	Single-sided	3	
	Double-sided	6	
Modules per foot	3		
Coverage per row	12 in		
Optimal light throw	5 to 12 inches from face		
Operating temperature	-40° C to +70° C		
Protection class	IP66 (pending)		
Special feature	Cuttable in 4 inch increments		
Power per module	Single-sided	0.90 W	
	Double-sided	1.80 W	
Efficacy	100 lm/W		
Power capacity	Per SloanLED 60 W 12 VDC power supply		
	Single-sided	60 modules	
	Double-sided	30 modules	
Fastening	Clamps with mechanical fasteners		
Packaging	20 ft (60 modules) per carton, 16 clamps included		
Colors	White (6500 K), White (5000 K)		
Lumens per module	Single-sided	90	
	Double-sided	180	
Mounting hardware	Bracket	Bag of 10	SLO-SB2-EB
	Clamp	Bag of 16	SLO-SB2-MC
	Coupler	Bag of 10	SLO-SB2-C

